


Homework H31.A

Given: A rod is made up of members (1) and (2) with these members having diameters of d_1 and d_2 , respectively, and are made of a material having a Young's modulus of E . The members are connected by the rigid connector C. Both members are made of a material having a Young's modulus of E and a yield strength of σ_{YP} .

Find: For this problem:

- Determine the stress in each member of the rod.
- Has the material in either member failed? If not, what is the factor of safety for the rod for this loading?

For this problem, use the following parameters: $d_1 = 1$ in, $d_2 = 2$ in, $P = 10$ kips, $E = 15 \times 10^3$ ksi and $\sigma_{YP} = 36$ ksi.

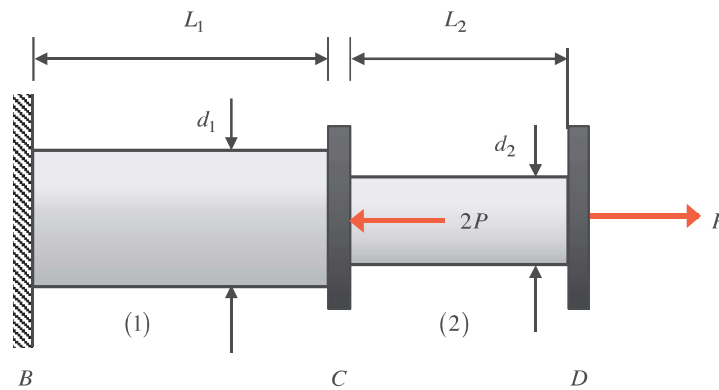

Homework H31.B

Given: The frame shown below is made up of the L-shaped member BH that is pinned to ground at O. AB is also supported by the rod AH that has a cross-sectional area of A . Member BH carries loads at locations B, D and H, as shown. Rod AH is made up of an aluminum alloy 6061-T6.

Find: For this problem:

- Determine the stress in rod AH.
- Has the material in rod AH failed due to yielding? If not, what is the factor of safety for this loading against yielding?

For this problem, use the following parameters: $P = 30 \text{ kN}$, $L = 1.5 \text{ m}$ and $A = 100 \text{ mm}^2$.

